



Product card No. OS-18-20230212-173118-148-2 Fan USC-SFN 60/50/35/80

Client	XPLO Sp. z o.o.	Prepared by	m.sekienda@netecs.pl
Commission	Wentylator V=7000 m ³ /h pt=2500 Pa	Creation date	2023-02-12
Project number	-	Comment	-

INPUT DATA

Supply frequency	50 [Hz]	Pressure type	Total
Pressure	2500 [Pa]	Air volume	7000 [m ³ /h]
Altitude ASL	0.000 [m]	Temperature	20 [°C]
Duct diameter	0.3 [m]	EX	No

OPERATING PARAMETERS

Air density	1.2 [kg/m ³]	Air volume	6913 [m ³ /h]
Static pressure	2172 [Pa]	Total pressure	2438 [Pa]
Dynamic pressure	266 [Pa]	Total efficiency	0.889 [-]
Static efficiency	0.792 [-]	Noise level	87.1 [dB(A)]
Shaft power	5.3 [kW]	Installed power	5.5 [kW]
Duct diameter	0.3 [m]	Operating frequency	50 [Hz]
Average air speed in ducting	27.16 [m/s]	Housing dimensions	885x819 [mm]
Weight	173 [kg]	Minimum amount of air at the minimum frequency	60 [m ³ /h]
Average rated fan speed	2970 [1/min]		

ATEX VERSION

	Inside	Outside
Zone	-	-
Equipment group	-	-
Equipment category	-	-
Type of explosion protection	-	-
Temperature class	-	-
ATEX marking	-	-

WORK RESTRICTIONS

	Minimum	Maximum
Temperature of the conveyed medium	20 [°C]	60 [°C]
Ambient temperature	-20 [°C]	40 [°C]
Rotor revolutions	-	3000 [1/min]

MOTOR

Producer	Lammers	Motor poles	2
Rated speed	2950 [1/min]	Rated power	5.5 [kW]
Motor designation	1TZ9003-1CA0_132S	Frequency	50 [Hz]
Rated voltage	400/690 [V]	Protection class	IP55
Thermal protection class	F	Efficiency class	IE3
Winding protection	1 thermistor kit	Reinforced bearings	Yes
Special version	No		

CORROSION PROTECTION

Class / Category	C2	Underlay	ZG15
Paint finish	ZE27	Temperature resistance	120 °C
Total layer thickness	80 µm	RAL colour of the housing	5015
RAL colour of the rest of the fan	5015	RAL colour of the motor	5015

FAN

Fan kind	CLASSIC Clean gas fans	Fan type	USC-SFN
Fan type number	60/50/35/80	Fan position	GL 360 (LG 0)
Execution	Standard	Medium	Clean gas
Impeller	Closed	Drive	Direct
Balancing class	G6,3	Number of fans	1
Additional information	Welded steel housing, impeller statically and dynamically balanced		



Product card No. OS-18-20230212-173118-148-2
Fan USC-SFN 60/50/35/80

ACCESSORIES

Additional accessories

Equipment included in
price

VALUATION

Fan USC-SFN 60/50/35/80

Total price: 2 915.20 EUR

DELIVERY AND ADDITIONAL INFORMATIONS

Delivery time

6 to 8 weeks from order date

Offer expiration time

6 weeks

Characteristic curve

USC-SFN 60/50/35/80

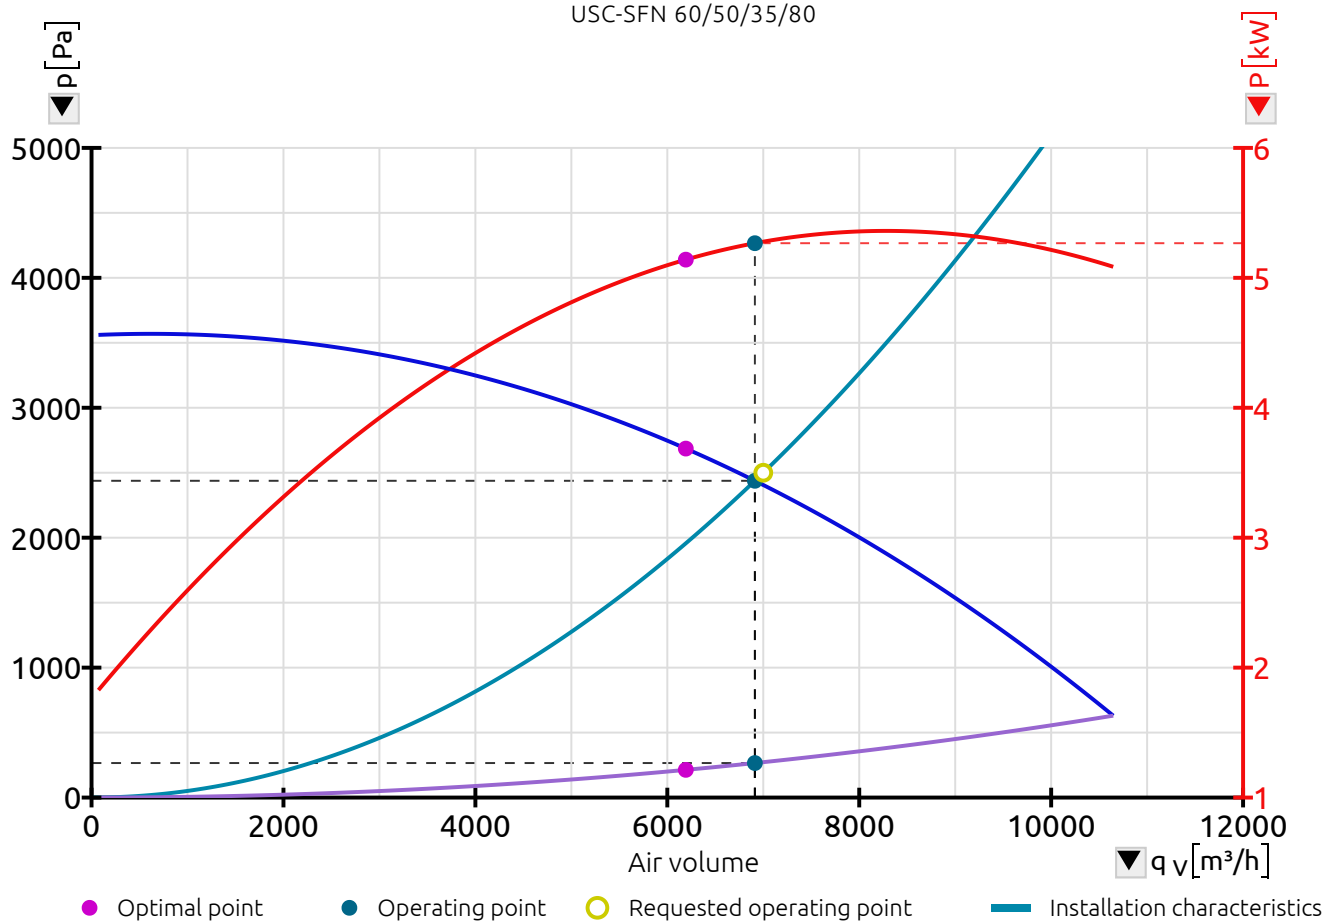


CHART COMPONENTS

Total pressure [p_T]	Total efficiency [η_T]	Shaft power without material [P_a]		Current at voltage V_1 (400 V)
Static pressure [p_{sF}]		Shaft power with material [P_a]	Noise level [L_{A6}]	
Dynamic pressure [p_{dF}]	Static efficiency [η_{sF}]	Electrical power [P_e]		Current at voltage V_2 (690 V)


MAIN AXIS

Pressure [p]	Efficiency [η]	Power [P]	Noise level [L]	Current [I]
------------------	-----------------------	---------------	---------------------	-----------------


OPERATING POINT

Air density	1.2 [kg/m³]	Air volume	6913 [m³/h]
Static pressure	2172 [Pa]	Total pressure	2438 [Pa]
Dynamic pressure	266 [Pa]	Total efficiency	0.889 [-]
Static efficiency	0.792 [-]	Noise level	87.1 [dB(A)]
Shaft power	5.3 [kW]	Installed power	5.5 [kW]
Duct diameter	0.3 [m]	Operating frequency	50 [Hz]
Average air speed in ducting	27.16 [m/s]	Housing dimensions	885x819 [mm]
Weight	173 [kg]	Minimum amount of air at the minimum frequency	60 [m³/h]
Average rated fan speed	2970 [1/min]		


Total pressure [p_F]

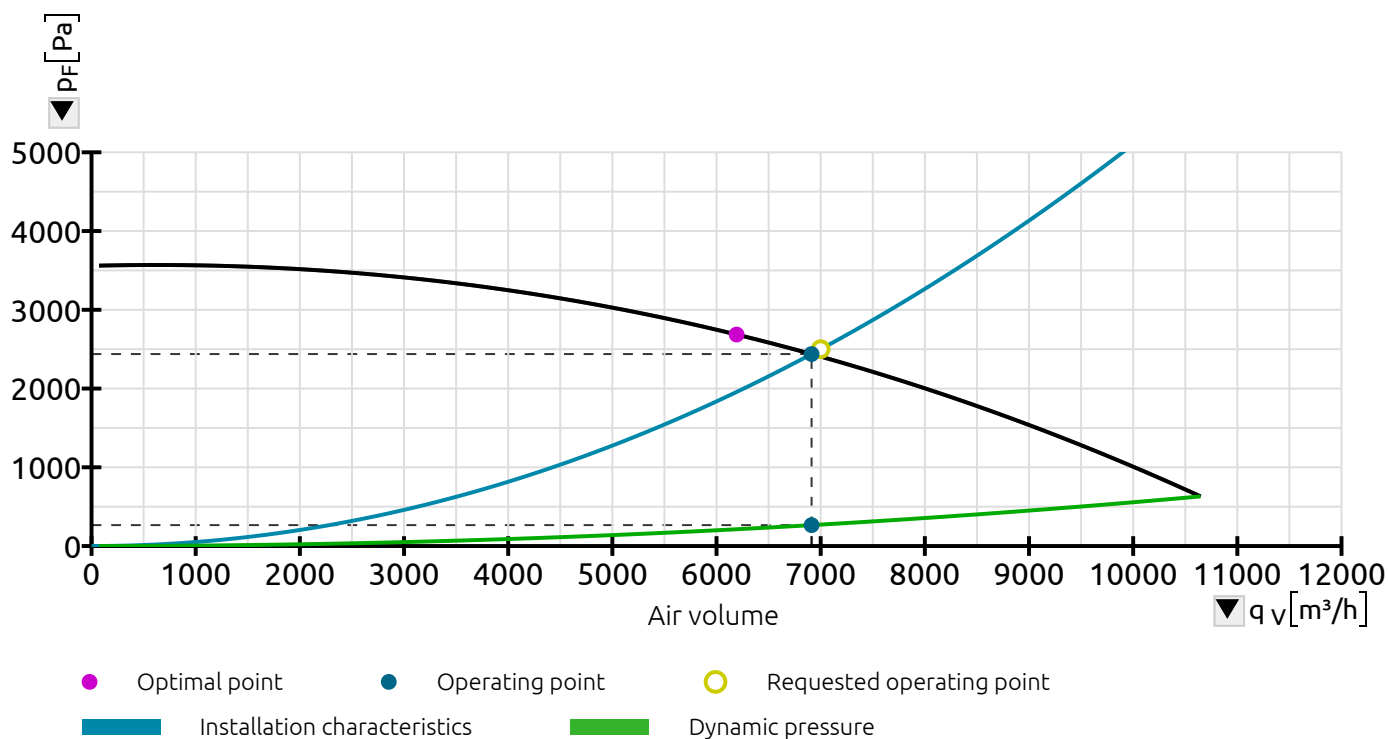

Shaft power without material [P_a]

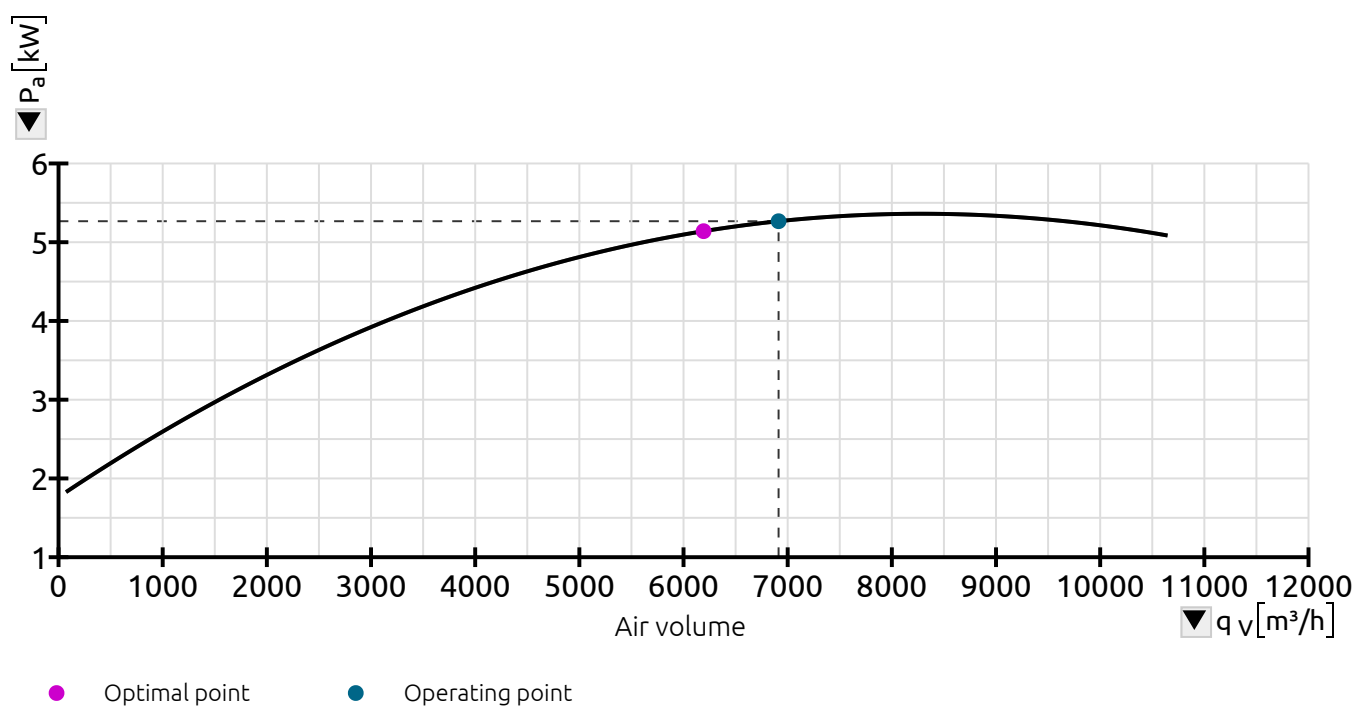

Noise level [L_{A6}]

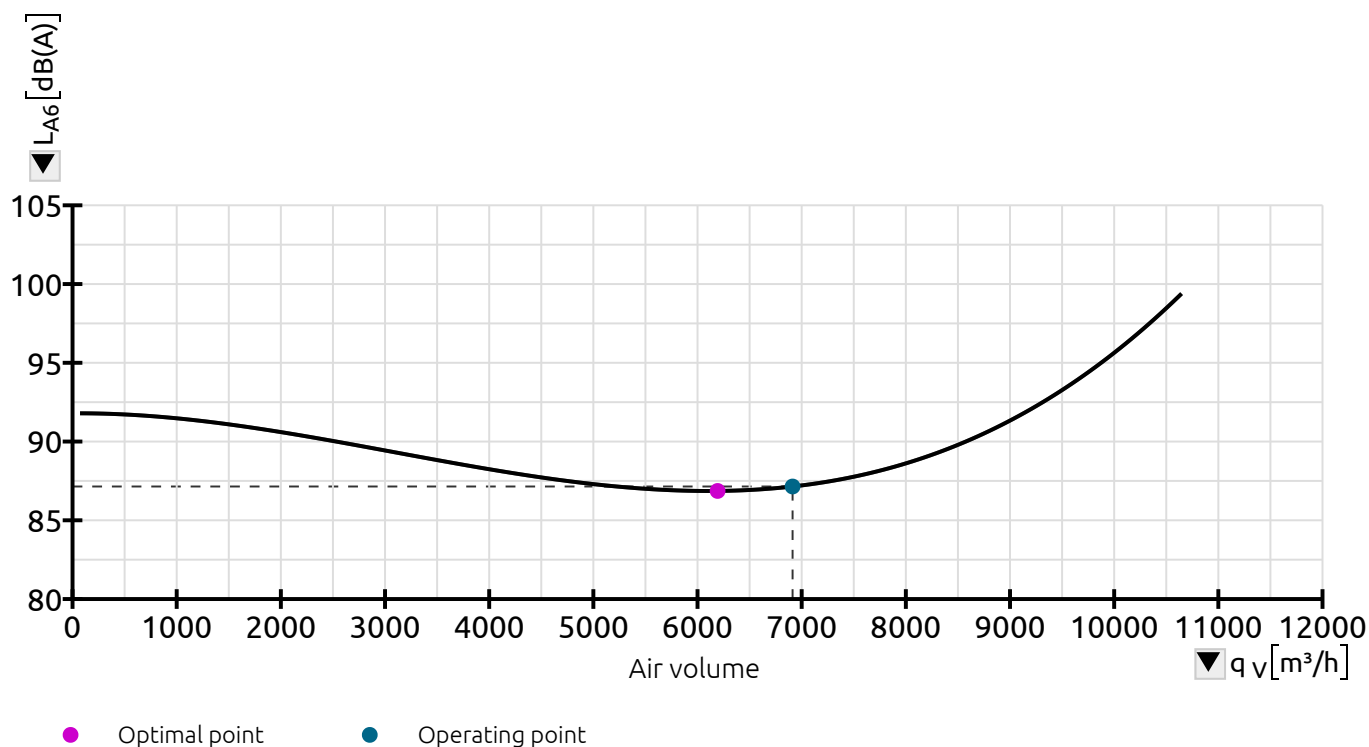



[DOWNLOAD FAN RENDER](#)